


4-6 PCB LED ILLUMINATED PUSH BUTTON


MECHANISM

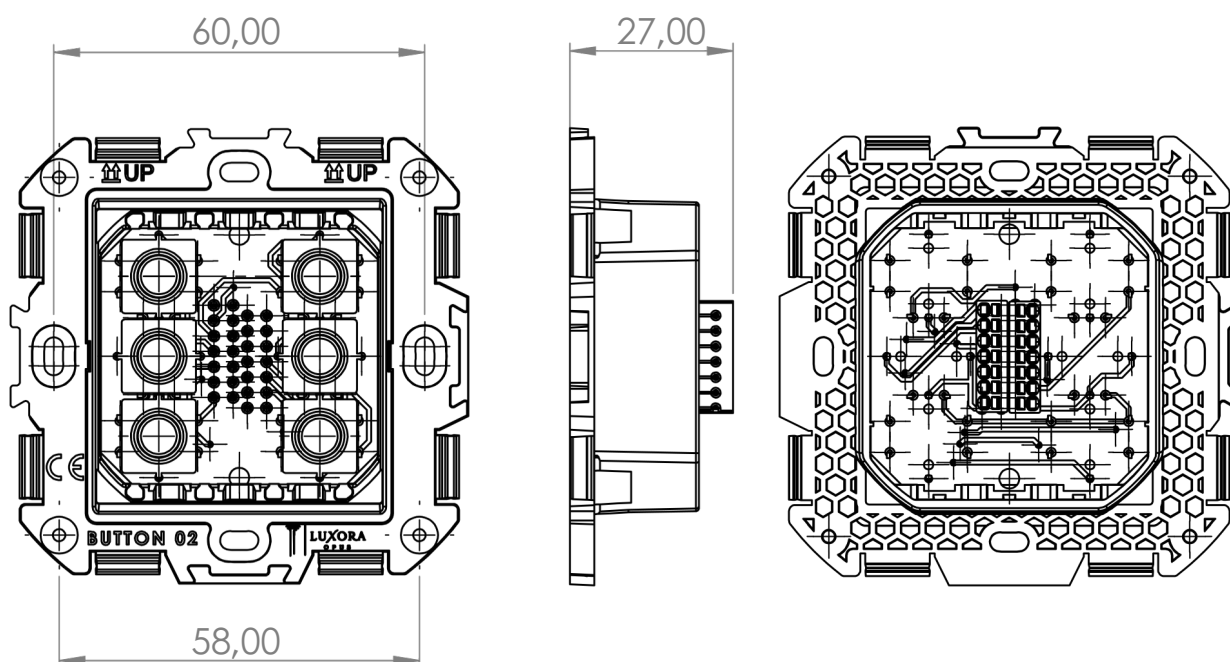


Features	Specification
Product Type	Illuminated Tact Switch PCB
Available Versions	4-6 Button
Switch Type	Momentary Dry Contact
Contact Rating	12 VDC, 50 mA Max.
LED Indicator	White LED (Standard), Other Colors Optional
LED Light Guide	1 mm Optical Light Pipe
Operating Interface	Dry Contact Binary Interface
Compatible Systems	KNX and Other Bus Systems*
Operating Temperature	-40°C to +125°C
Customization	LED Color, Connector, Button Layout

4-6 PCB LED ILLUMINATED PUSH BUTTON


WIRING DIAGRAM

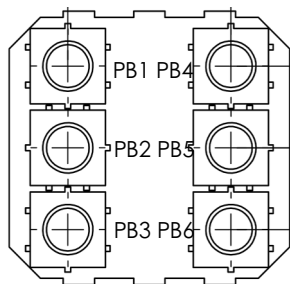

Front View

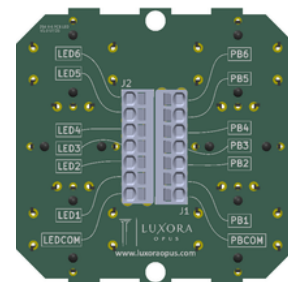

Back View

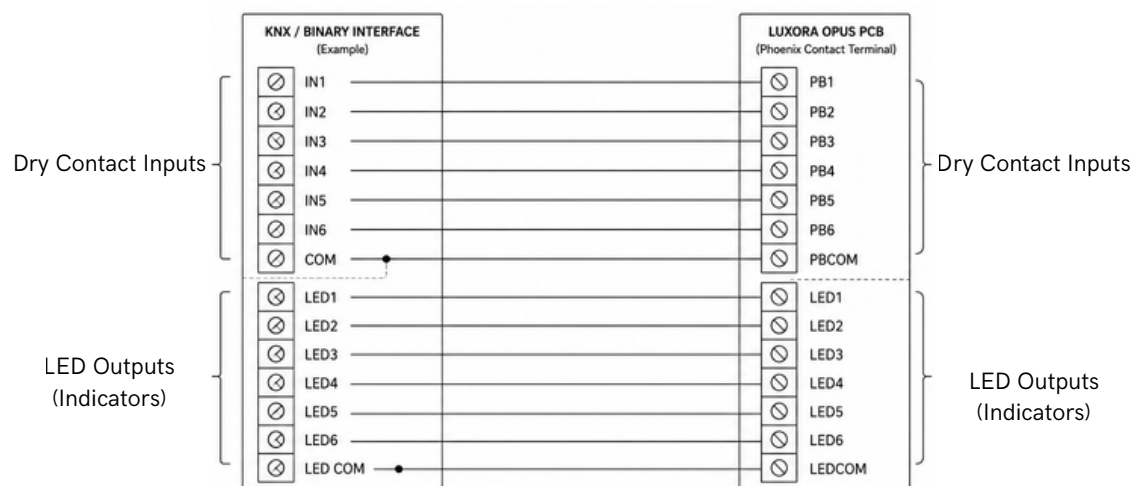

NOTES

- PB1-PB6: Momentary dry contact inputs (active to PBCOM)
- PBCOM: Common terminal for all push buttons
- LED1-LED6: Individual LED outputs
- LEDCOM: Common terminal for LED supply (anode or cathode depending on interface)
- Compatible with KNX binary interfaces and other dry contact automation systems